

PATENT APPLICATION SERIAL NO. \_\_\_\_\_

U.S. DEPARTMENT OF COMMERCE  
PATENT AND TRADEMARK OFFICE  
FEE RECORD SHEET

08/31/1999 NVILLARI 00000047 500417 09374041

01 FC:108 760.00 CH

02 FC:110 18.00 CH

10/27/2000 JWASHING 00000013 500417 09374041

01 FC:105 130.00 CH

PTO-1556

(5/87)

08/13/99  
JC639 U.S. PTO

cket No.: 50246-068

**PATENT**

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**


In re Reissue of U.S. Patent 5,598,525

Issued January 28, 1997

To Robert M. Nally, et al.

Based on Serial No.: 376,919

Filed: January 23, 1995



Group Art Unit:

Examiner:

For: APPARATUS, SYSTEMS AND METHODS FOR CONTROLLING GRAPHICS AND VIDEO  
DATA IN MULTIMEDIA DATA PROCESSING AND DISPLAY SYSTEMS

**REISSUE APPLICATION TRANSMITTAL**

Box 7

Assistant Commissioner for Patents  
Washington, D.C. 20231

Sir:

Transmitted herewith is an application for reissue of U.S. Patent No. 5598525 issued on January 23, 1995 to  
inventors Robert M. Nally and John C. Schafer.

Enclosed are the following:

**SPECIFICATION, CLAIMS AND DRAWINGS**

- (a) ☒ 14 pages of specification and cover page  
☒ 9 pages of claims  
☒ 1 page of abstract  
(b) ☐ sheets of formal drawings  
☐ No changes in the drawings upon which the original patent was issued are to be made. Therefore, in accordance with 37 CFR §1.174, please find attached, in the size required for original drawings:  
☒ a copy of the printed drawings of the patent (4 sheets)  
☐ a photoprint of the original drawings.

**2. DECLARATION AND POWER OF ATTORNEY**

- ☒ 12 pages of declaration and power of attorney (unsigned)

Jc135 U.S. PTO  
09/374041  
08/13/99

3. PRELIMINARY AMENDMENT  
attached

4. OFFER TO SURRENDER THE ORIGINAL LETTERS PATENT IN ACCORDANCE WITH 37 CFR §1.178  
☒ attached (unsigned)

5. LETTERS PATENT  
☐ original letters patent attached  
☐ declaration that original letters patent lost or inaccessible

6. TITLE  
In accordance with 37 CFR §1.171, this application for reissue is accompanied by:  
☐ a certified copy of an abstract of title  
or  
X Certificate under 37 C.F.R. 3.73(b)

7. INFORMATION DISCLOSURE STATEMENT  
☒ attached with 21 Exhibits

PRIORITY - 35 USC §119  
☐ Priority of Patent Application filed on in is claimed under 35 USC §119.  
☐ The certified copies have been filed in prior application Serial No. filed on .

FEE CALCULATION (37 CFR §1.16(i) AND (j))  
Claims as Filed:

	NO. OF CLAIMS		EXTRA CLAIMS	RATE	AMOUNT
Total Claims	48	-20		\$18.00 =	\$504.00
Independent Claims	6	-3		\$78.00 =	\$234.00
Basic Application Fee					\$790.00
Fee for Title Report					0
Total Application Fee					\$1528.00
Subtract ½ if small entity					
<b>TOTAL APPLICATION FEE DUE</b>					<b>\$1528.00</b>
<b>AMOUNT TO BE CHARGED TO DEPOSIT ACCOUNT NO. 500417</b>					<b>\$1528.00</b>

10. SMALL ENTITY STATUS (if applicable)  
☐ A verified statement that this filing is by a small entity is attached

11. ASSIGNMENT INFORMATION (if applicable)

☒ The prior application is assigned of record to . Cirrus Logic, Inc. See Certificate under 37 C.F.R. 3.73(b), attached.

12. METHOD OF PAYMENT OF FEES

☒ Charge Deposit Account No. 500417 in the amount of \$ 1510.00. Two copies of this request are attached.

13. AUTHORIZATION TO CHARGE ADDITIONAL FEES

☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication and during the entire pendency of this application or credit any overpayment to Deposit Account No. 500417. Two duplicate copies are enclosed.

- ☒ 37 CFR §1.16 (filing fees)
- ☒ 37 CFR §1.16 (presentation of extra claims)
- ☒ 37 CFR §1.16(e) (surcharge for filing the basic filing fee and/or declaration on a date later than the filing date of the application.
- 37 CFR §1.17 (application processing fees)
- 37 CFR §1.18 (issue fee at or before mailing of Notice of Allowance, Pursuant to 37 CFR 1.§311(b).

Respectfully submitted,

MCDERMOTT, WILL & EMERY



David L. Stewart  
Registration No. 37,578

500 13<sup>th</sup> Street, N.W.  
Washington, DC 20005-3096  
(202) 756-8000 DLS:pgb

**Date: August 13, 1999**  
Facsimile: (202) 756-8087

# APPARATUS, SYSTEMS AND METHODS FOR CONTROLLING GRAPHICS AND VIDEO DATA IN MULTIMEDIA DATA PROCESSING AND DISPLAY SYSTEMS

5

## TECHNICAL FIELD OF THE INVENTION

The present invention relates in general to multimedia processing and display systems and in particular to apparatus, systems and methods for controlling graphics and video data overlay in multimedia processing and display systems.

10

## CROSS-REFERENCE TO RELATED APPLICATIONS

The following copending and coassigned United States patent applications contain related information and are incorporated herein by reference:

15

U.S. patent application Ser. No. 08/098,846 (Attorney's Docket No. P3510-P11US), entitled "System And Method For The Mixing Of Graphics And Video Signals," and filed Jul. 29, 1993; and

20

U.S. patent application Ser. No. 08/223,845 (Attorney's Docket No. P3510-P21US), entitled "Apparatus, Systems And Methods For Processing Video Data In Conjunction With A Multi-Format Frame Buffer," and filed Apr. 6, 1994.

25

## BACKGROUND OF THE INVENTION

As multimedia information processing systems increase in popularity, system designers must consider new techniques for controlling the processing and display of data simultaneously generated by multiple sources. In particular, there has been substantial demand for processing systems which have the capability of concurrently displaying both video and graphics data on a single display screen. The development of such systems presents a number of design challenges, not only because the format differences between graphics and video data must be accounted for, but also because of end user driven requirements that these systems allow for flexible manipulation of the data on the display screen.

30

35

40

One particular technique for simultaneously displaying video and graphics data on a single display screen involves the generation of "windows." In this case, a stream of data from a selected source is used to generate a display within a particular region or "window" of the display screen to the exclusion of any non-selected data streams defining a display or part of a display corresponding to the same region of the screen. The selected data stream generating the display window "overlays" or "occludes" the data from the nonselected data streams which lie "behind" the displayed data. In one instance, the overall content and appearance of the display screen is defined by graphics data and one or more "video windows" generated by data from a video source occlude a corresponding region of that graphics data. In other instances, a video display or window may be occluded or overlaid by graphics data or even another video window.

45

50

55

In the multimedia environment, the "windowing" described above yields substantial advantages. Among other things, the user can typically change the size and location on the display screen of a given window to flexibly manipulate the content and appearance of the data being displayed. For example, in the case of combined graphics and video, the user can advantageously create custom composite visual displays by combining multiple video and graphics data streams in windowing environment.

60

65

U.S. Pat. No. 5,442,442  
U.S. Pat. No. 5,442,443  
U.S. Pat. No. 5,442,444  
U.S. Pat. No. 5,442,445  
U.S. Pat. No. 5,442,446  
U.S. Pat. No. 5,442,447  
U.S. Pat. No. 5,442,448  
U.S. Pat. No. 5,442,449  
U.S. Pat. No. 5,442,450  
U.S. Pat. No. 5,442,451  
U.S. Pat. No. 5,442,452  
U.S. Pat. No. 5,442,453  
U.S. Pat. No. 5,442,454  
U.S. Pat. No. 5,442,455  
U.S. Pat. No. 5,442,456  
U.S. Pat. No. 5,442,457  
U.S. Pat. No. 5,442,458  
U.S. Pat. No. 5,442,459  
U.S. Pat. No. 5,442,460  
U.S. Pat. No. 5,442,461  
U.S. Pat. No. 5,442,462  
U.S. Pat. No. 5,442,463  
U.S. Pat. No. 5,442,464  
U.S. Pat. No. 5,442,465  
U.S. Pat. No. 5,442,466  
U.S. Pat. No. 5,442,467  
U.S. Pat. No. 5,442,468  
U.S. Pat. No. 5,442,469  
U.S. Pat. No. 5,442,470  
U.S. Pat. No. 5,442,471  
U.S. Pat. No. 5,442,472  
U.S. Pat. No. 5,442,473  
U.S. Pat. No. 5,442,474  
U.S. Pat. No. 5,442,475  
U.S. Pat. No. 5,442,476  
U.S. Pat. No. 5,442,477  
U.S. Pat. No. 5,442,478  
U.S. Pat. No. 5,442,479  
U.S. Pat. No. 5,442,480  
U.S. Pat. No. 5,442,481  
U.S. Pat. No. 5,442,482  
U.S. Pat. No. 5,442,483  
U.S. Pat. No. 5,442,484  
U.S. Pat. No. 5,442,485  
U.S. Pat. No. 5,442,486  
U.S. Pat. No. 5,442,487  
U.S. Pat. No. 5,442,488  
U.S. Pat. No. 5,442,489  
U.S. Pat. No. 5,442,490  
U.S. Pat. No. 5,442,491  
U.S. Pat. No. 5,442,492  
U.S. Pat. No. 5,442,493  
U.S. Pat. No. 5,442,494  
U.S. Pat. No. 5,442,495  
U.S. Pat. No. 5,442,496  
U.S. Pat. No. 5,442,497  
U.S. Pat. No. 5,442,498  
U.S. Pat. No. 5,442,499  
U.S. Pat. No. 5,442,500

In order to efficiently control windows in a multimedia environment efficient frame buffer management is required. Specifically, a frame buffer control scheme must be developed which allows for the efficient storage and retrieval of multiple types of data, such as video data and graphics data. To be cost competitive as well as functionally efficient, such a scheme should minimize the number of memory devices and the amount of control circuitry required and should insure that data flow to the display is subjected to minimal delay notwithstanding data type.

One of the major difficulties in managing video in a combined video and graphics windowing environment results from the fact that the video data being received and displayed are constantly being updated, typically at a rate of thirty frames per second. In contrast, the graphics data are normally generated once to define the graphics display and then remain static until the system CPU change that graphics display. Thus, the occlusion (overlay) of video data with graphics data requires that the static graphics data "in front of" the video data not be destroyed each time the video window is updated. A second concern with windowing systems operating on both video and graphics data is the formatting differences between the video and graphics data themselves since video is typically digitized into a YUV color space while graphics is digitized into an RGB color space. Hence, any combination video and graphics windowing system must have the capability of efficiently handling data within both the YUV and RGB formats.

Thus, due to the advantages of windowing, the need has arisen for efficient and cost effective windowing control circuitry. Such windowing circuitry should allow for the simultaneous processing of data received from multiple sources and in multiple formats. In particular, such windowing control circuitry should be capable of efficiently and inexpensively controlling the occlusion and/or overlay of video and graphics data in a windowing environment.

#### SUMMARY OF THE INVENTION

The principles of the present invention in general provide for the flexible control of graphics and video data in a display control environment. In particular, an entire frame of video data, graphics data, or a combination of both, may be stored in on-screen memory and rastered out with the generation of the corresponding display screen. A window of graphics or video data can then be stored in off-screen memory and retrieved when the raster scan generating the display reaches the desired position on the display for the video window. The window of data from off-screen memory can then be overlayed over the data being rastered out of the on-screen memory under one of three conditions. In a first mode, pixels from the off-screen memory are rastered only when the raster scan has reached the position on the display selected for the window. In a second mode, a window of data is rastered from the off-screen memory when the display raster scan has reached the display window position and graphics data being rastered from the on-screen memory matches a color key. In a third mode, the window data is rastered out of the off-screen memory when the data being output from the on-screen memory matches the color key, notwithstanding the position of the raster scan.

According to a first embodiment of the present invention, a graphics and video controller is provided which includes a dual aperture interface, each word associated with an address to a selected one of on-screen and off-screen areas of an associated unified frame buffer as either graphics or

video pixel data. Circuitry is provided for writing a word of the pixel data received by the interface to a one of the on-screen and off-screen memory areas corresponding to the address associated with the received word. Circuitry is also included for selectively retrieving graphics and video data from the on-screen and off-screen memory areas. A first pipeline is provided for processing graphics data retrieved from the frame buffer and a second pipeline is provided for video processing data retrieved from the frame buffer.

According to a second embodiment of the present invention, a controller is provided which includes a dual aperture port for receiving video and graphics data, each word of the data received with an address associated directing the word to be processed as either graphics or video data and off-screen memory spaces of a frame buffer. A second port is included for receiving real-time video data. Circuitry is provided for generating an address associated with a selected one of the memory spaces for each word of received real-time video data. Circuitry is included for writing selectively the words into the on-screen and off-screen memory spaces of the frame buffer. Circuitry is also provided for selectively retrieving the words of data from the on-screen and off-screen spaces as data is rastered for driving a display. A graphics backend pipeline processes ones of the graphics words of data retrieved from the frame buffer. A video backend pipeline is provided for processing ones of the video words of data retrieved from the frame buffer, the circuitry for retrieving always rastering a stream of graphics data from the frame buffer to the graphics pipeline and rastering video data to the video backend pipeline when a display raster scan reaches a display position of a video window. An output selector is included for selecting for output between words of data output from the graphics backend pipeline and words of data output from the video backend pipeline.

According to

a third embodiment of the present invention, a display system is provided which includes first and second parallel backend pipelines. A multi-format frame buffer memory is included having on-screen and off-screen memories each operable to simultaneously store data in graphics and video formats. A dual aperture port is provided for receiving both graphics and video data as directed by an address associated with each word of data received. Circuitry for writing is included for writing a word of video or graphics data into a selected one of the on-screen and off-screen areas of the multi-frame buffer. Memory control circuitry controls the transfer of data between the first and second [back-end] backend

pipelines and the frame buffer. The system further includes a display unit and overlay control circuitry for selecting for output to the display unit between data provided by the first backend pipeline and data provided by the second backend pipeline.

A fourth embodiment of the present invention comprises a display data processing system which includes circuitry for writing data into an on-screen space of a frame buffer and circuitry for writing data into an off-screen space of the frame buffer. A video pipeline is provided for processing video data output from a selected one of the on-screen and off-screen spaces. The video pipeline includes a first first-in/first-out memory for receiving selected pixel data from the selected space. The video pipeline also includes a second first-in/first-out memory disposed in parallel to the first first-in/first-out memory for receiving other selected data from the selected space in the frame buffer. An interpolator is provided as part of the video pipeline for generating additional data by interpolating data output from the first and second first-in/first-out memories. A graphics pipeline is

disposed in parallel to the video pipeline for processing graphics data output from a selected one of the on-screen and off-screen spaces. Finally, an output selector is provided for selecting between data output from the video pipeline and data output from the graphics pipeline.

The principles of the present invention allow for the construction of circuits and systems with substantial advantages over the prior art. Among other things, the principles of the present invention allow both graphics and video data to be stored in a single unified frame buffer and retrieved therefrom in a number of different ways. For example, a combination of graphics and video data may be stored in the on-screen memory and simply rastered out during screen refresh. In another case, an entire screen of graphics or video data may be stored in the on-screen memory while a window of graphics or video data is stored in the off-screen portion of memory. The window data can then be rastered out to selectively overlay a portion of the data being rastered out of the on-screen memory. The overlay may be controlled by either window display position with a match of the on-screen data being rastered out and a color key, or both.

The embodiments of the present invention provide for the efficient and inexpensive overlay of video and graphics data in a windowing environment. In particular, the use of color comparison to determine the overlay of data in a window region eliminates the need for precise x- and y-position data for the location of that window and allows for video cropping to be performed. Further, the use of graphics data to control overlay provides substantial advantages in that graphics data is less subject to the graininess and noise problems often found with video data. Further, the user is given total control of overlay operations when keying on graphics data because the graphics data is computer generated, whereas the video data is captured data.

#### BRIEF DESCRIPTION OF THE DRAWINGS

For a more complete understanding of the present invention, and the advantages thereof, reference is now made to the following descriptions taken in conjunction with the accompanying drawings, in which:

FIG. 1 is a top level functional block diagram of a multi-media processing and display system embodying the principles of the present invention;

FIG. 2 is a more detailed functional block diagram of the VGA controller depicted in FIG. 1;

FIG. 3 is an expanded functional block diagram of portions of the controller of FIG. 2 with emphasis on the overlay control features;

FIG. 4A is a detailed functional block diagram of a first embodiment of the color comparison circuitry of FIG. 3;

FIG. 4B is a detailed functional block diagram of a second embodiment of the color comparison circuitry of FIG. 3; and

FIG. 5 is a detailed functional block diagram of a selected one of the video window position control circuits depicted in FIG. 3.

#### DESCRIPTION OF THE INVENTION

FIG. 1 is a high level functional block diagram of a multi-media processing and display system 100 operable to process and simultaneously display on a single display screen both graphics and video data according to the principles of the present invention. Display system 100 includes a central processing unit (CPU) 101 which controls the overall operation of system 100 and generates graphics data



defining graphics images to be displayed. CPU 101 communicates with the remainder of the system discussed below via a local bus 103. System 100 also includes a real-time video data source 104. A real time video stream may be presented to the system VGA controller 105 in one of two ways. First, video data source 104 may be coupled to local bus 103 and a video data stream introduced through dual aperture addresses. In this case, video source 104 will directly address the system frame buffer 107. Second, video source 104 may be coupled directly to VGA controller 105 via a dedicated bus 109 or "video port." In this instance, VGA controller 105 generates the required addresses into frame buffer 107. Real-time video source 104 may be, for example, a CD ROM unit, a laser disk unit, a videotape unit, television cable outlet or other video data source outputting video data in a YUV format. CPU 101 operates in conjunction with a system memory 108 which stores graphics and video data on a real-time basis. System memory 108 may be for example random access memory (RAM), floppy disk, hard disk or other type of storage device.

A VGA controller 105 embodying the principles of the present invention is also coupled to local bus 103. VGA controller 105 will be discussed in detail below; however, VGA controller 105 generally interfaces CPU 101 and video source 104 with a display unit 106 and a multiformat system frame buffer 107. Frame buffer memory 107 provides temporary storage of the graphics and video data during processing prior to display on display unit 106. According to the principles of the present invention, VGA controller is operable in selected modes to store graphics and video data together in frame buffer 107 in their native formats. In a preferred embodiment, the frame buffer area is partitioned into on-screen memory and off-screen memory. Frame buffer 107 is also a "unified" memory in which video or graphics data can be stored in either the on-screen or off-screen areas. In the preferred embodiment, display unit 106 is a conventional raster scan display device and frame buffer 107 is constructed from dynamic random access memory devices (DRAMs).

FIG. 2 is a more detailed functional block diagram of VGA controller 105. The primary circuitry blocks of VGA controller 105 include video front-end video pipeline 200, memory (frame buffer) control circuitry 201, CRT/window control circuitry 202, video window control registers 203, video [back-end] backend pipeline 204 and graphics

[back-end] backend pipeline 204 and graphics back-end pipeline 205. VGA controller 105 further includes a CPU interface 206 for exchanging instructions and data via a PCI or VL bus, such as local bus 103 in system 100, with CPU 101. A write buffer 207 and conventional graphics controller 208 allow CPU 101 to directly control data within frame buffer 107 via memory control circuitry 201.

In the preferred embodiment of system 100, CPU 101 can write video data and/or read and write graphics data to frame buffer 107 via CPU interface 206. In particular, CPU 101 can direct each pixel to the frame buffer using one of two maps depending on whether that pixel is a video pixel or a graphics pixel. In the preferred embodiment, each word of pixel data ("pixel") is associated with one of two addresses, one which directs interpolation of the pixel as a video pixel through video front-end pipeline 200 and the other which directs interpolation of the pixel as a graphics pixel through write buffer 207 and graphics controller 208. As a consequence, either video or graphics pixel data can then be input to CPU interface 206 from the PCI/VI bus through a single "dual aperture" port as a function of the selected address.

Data which is input through the video port 211 is address-free. In this case, video window controls 213 generates the

required addresses to either the on-screen memory area or the off-screen memory as a function of display location for the video window. In the preferred embodiment, window controls 213 generate addresses using the same video control registers 203 used to control retrieval of the video in the  
 5 [back-end] backend pipeline (i.e., the screen x and y position registers 500 and 501 discussed below in conjunction with FIG. 5). When data is being received through both the CPU interface 206 and the VPORT 211 simultaneously, the data is interleaved into memory with the two write buffers 207 and 217  
 10 buffering the data such that neither stream is interrupted or forced into a wait state at the source component (i.e., bus 103 or video source 104).

It should be noted at this point that frame buffer 107 includes at least two different data areas or spaces to which  
 15 data can be directed by the given address (either CPU 103 or controls 213 generated.)


Each space can simultaneously store graphics or video data depending on the selected display configuration. The on-screen area corresponds to the display screen; each pixel rastered out of a given pixel  
 20 location in the on-screen area defines a corresponding screen pixel. The off-screen area is used to store data defining a window for selectively overlaying the data from the on-screen memory, fonts and other data necessary by controller  
 25 105. Further, as will be discussed [further] below, both graphics and video data may be rastered from frame buffer 107 and passed through video backend pipeline 204 while only graphics data is ever passed through graphics backend pipeline 205.

According to the principles of the present invention, there are alternate ways of storing and retrieving graphics and video data from unified frame buffer 107.

For example, CPU 103 may write a static graphics background into part of the on-screen memory with the remaining "window" in the on-screen memory area filled with  
 35 playback video data. "Playback" video data can be either (1) live video data input from the VPORT; (2) YUV (video) data written through interface 206 by CPU 103; or (3) true color (5:5:5, 5:6:5, or 8:8:8) RGB graphics data (for example animation graphics data) written in through either the  
 40 VPORT or interface 206. Similarly, a playback video background and a window of graphics data may be written into the on-screen area. In each of these cases, the data is rastered out as the display is without overlap: the video playback data  
 45 is passed through [the video playback data is passed through] the video backend pipeline 204 as a function of display position by controls 202 and the graphics data passed through the graphics backend pipeline 205.

Windows of data retrieved from the off-screen memory can be retrieved and used to occlude a portion of the data  
 50 being rastered out of the on-screen memory. For example, a window of playback data can be stored in the off-screen memory and a frame of static graphics data (either true color data or indices to CLUT 234) stored in the on-screen  
 55 memory. In this case, the static graphics are rastered out of the on-screen memory without interruption and passed through the graphics backend pipeline 205. The window of data in the off-screen memory is rastered out only when the display position for the window has been reached by the  
 60 display raster and is passed through video backend pipeline 204. As discussed below, data from the video backend pipeline 204 can then be used to selectively occlude (overlay) the data being output from the graphics backend pipeline 205. A window of static graphics data (true color or  
 65 indices to the CLUT 234) can be stored in off-screen memory and used [of] to

overlay playback video from the on-screen memory[, the]. The playback video data is passed



through the video backend pipeline 204 and the window of static graphics data is passed through the graphics backend pipeline 205.

Bit block transfer (BitBLT) circuitry 209 is provided to allow blocks of graphics data within frame buffer 107 to be transferred, such as when a window of graphics data is moved on the display screen by a mouse. Digital-to-analog converter (DAC) circuitry 210 provides the requisite analog signals for driving display 106 in response to the receipt of either video data from video [back-end] backend pipeline 204 or graphics data from [back-end pipe line] backend pipeline 208.

In implementing the operations discussed above, video front-end pipeline 200 can receive data from two mutually exclusive input paths. First, in the "playback mode," playback (non-real time) data may be received via the PCI bus through CPU interface 206. Second, in the "overlay emulation mode" either real-time or playback video may be received through the video port interface 211 (in system 100 video port interface 211 is coupled to bus 109 when real-time data is being received). The selection of video from the PCI bus or video from video port interface 211 is controlled by a multiplexer 212 under the control of bits stored in a video front-end pipeline control register within video control registers 203. In the playback mode, either CPU 101 or a PCI bus master controlling the PCI bus provides the frame buffer addresses allowing video front-end pipeline 200 to map data into the frame buffer separate and apart from the graphics data. In the overlay emulation mode, overlay input window controls 213 receives framing signals such as VSYNC and HSYNC, tracks these sync signals with counters to determine the start of each new frame and each new line, generates the required addresses for the real-time video to the frame buffer space using video window position data received from window controls 222 (as discussed above, in the preferred embodiment, video data is always retrieved from either the on-screen or off-screen memory and passed through video back-end pipeline 204 as a function of display position) and thus the position data from controls 222 is used to both write data to memory and retrieve data therefrom. In general, overlay input video control windows are controlled by the same registers which control the [back-end] backend

video pipeline 204, although the requisite counters and comparators are located internal to overlay input video control circuitry 213.

Video front-end pipeline 200 also includes encoding circuitry 214 that is operable to truncate 16-bit YUV 422 data into an 8-bit format and then pack four such 8-bit encoded words into a single 32-bit word which is then written into the video frame buffer space of frame buffer 105. Conversion circuitry 215 is operable to convert RGB 555 data received from either the CPU interface 206 and the PCI bus or VPORT I/F 211 into YCrCb (YUV) data prior to encoding by encoding circuitry 214. Conversion circuitry 215 allows graphics data (for example in a 5:5:5 or 5:6:5 format) to be introduced through the VPORT or graphics data to be converted, packed and stored in a YUV format in the off-screen memory space by CPU 101. For a more complete description of encoder 214 and the associated decoder 225 of video pipeline 204, reference is now made to incorporated copending coassigned application Ser. No. 08/223,845. The selection and control of the encoding circuitry 214 and conversion circuitry 215 is implemented through multiplexing circuitries 212 and 216, each of which are controlled by bits in the video control registers. Finally, video front-end pipeline 200 includes a write buffer/FIFO 217 which in one embodiment acts as a write buffer and in an alternate embodiment acts as a FIFO for the video

backend pipeline 204. In embodiments where buffer 217 acts as a write buffer for then Y, zooming on the [back-end,] backend, as discussed below is by replication. In embodiments where buffer 217 operates as a FIFO, then the VPORT and front and end color conversion by converter circuitry 215 are not used for writing data to frame buffer 107.

Memory control circuitry 201 includes an arbiter 218 and a memory interface 219. Arbiter 218 prioritizes and sequences requests for access to frame buffer 107 received from video front-end pipeline 200, graphics controller 208 and bit block transfer circuitry 209. Arbiter 218 further sequences each of these requests with the refresh of the display screen of display 106 under the control of CRT controller 202. Memory interface 219 controls the exchange of addresses, data, and control signals (such as RAS, CAS and read/write enable) to and from frame buffer 107.

CRT control/video window control circuitry 202 includes the CRT controller 220, window arbiter 221, and video display window controls 222. CRT controller 202 controls the refresh of the screen of display 106 and in particular the rastering of data from frame buffer 107 to display unit 107 through DAC 210. In the preferred embodiment, CRT controller 220, through arbiter 218 and memory interface 219, maintains a constant stream of graphics data into graphics backend pipeline 205 from memory; video or playback graphics data is rastered out only when a window has been reached by the display raster as determined by display position controls of window controls 222 (see FIGS. 3 and 5 and accompanying text) and CRT controller 220. As will be discussed in further detail below, the display of windows within the display according to the principles of the present invention is controlled in part by circuitry 202.

#### Video [back-end] backend

pipeline 204 receives a window of graphics video data defining a display window from the on-screen or off-screen spaces in frame buffer 107 through a pair of first-in/first-out memories 223 and 217 (in embodiments where buffer 217 is acting as FIFO B). In the preferred embodiment, each FIFO receives the data for every other display line of data being generated for display on the display screen. For example, for a pair of adjacent lines  $n-1$  and  $n+1$  in memory (although not necessarily adjacent on the display) for the display window, FIFO 223 receives the data defining window display line  $n-1$  while FIFO 224 receives the data defining window display line  $n+1$ . When buffer 217 is used as FIFO B, writes through video front end pipeline 200 are made through write buffer I 207 and multiplexer 235. Alternatively, if buffer 217 is used as write buffer II, then FIFO B is not implemented and only a single stream is processed by video [back-end] backend

pipeline 204 (no Y interpolation is performed and Y expansion is by replication). As will be discussed further below (assuming both FIFO A and FIFO B are being used), one or more display lines, which falls between line  $n-1$  and line  $n+1$ , may be selectively generated by interpolation. Decoder circuitry 225 receives two 32-bit packed words (as encoded by encoder 214), one from each adjacent scan line in memory, from FIFOs 223 and 217. Each 32-bit word, which represents four YCrCb pixels, is expanded and error diffused by decoder 225 into four 16-bit YCrCb pixels. In modes where video data is stored in the frame buffer in standard 555 RGB or 16 YCrCb data formats, decoder block 225 is bypassed.

#### [Back-end] Backend

video pipeline 204 further includes a Y interpolator 226 and X interpolator 227. In the preferred embodiment, during Y zooming (expansion) Y interpolator 226 accepts two vertically adjacent 16-bit RGB or YCrCb pixels from the decoder 225 and calculates one or more resampled output pixels using a four subpixel granularity. X interpo-

interpolator 227 during X zooming (expansion) accepts horizontally adjacent pixels from the Y interpolator 226 and calculates one or more resampled output pixels using a four subpixel granularity. For data expansion using line replication, Y interpolator 226 is bypassed. Y interpolator 226 and X interpolator 227 allow for the resizing of a video display window being generated from one to four times.

The output of X interpolator 227 is passed to a color converter 228 which converts the YCrCb data into RGB data for delivery to output multiplexer 304. To reiterate, if graphics data is passed through video pipeline converter 228 is not used.

#### [Back-end] Backend

video circuitry 204 further includes pipeline control circuitry 229, overlay control circuitry 230 and output multiplexer 231. Pipeline control circuitry 229 controls the reading of data from video FIFOs 223 and 217, controls the generation of interpolation coefficients for use by X and Y interpolators 226 and 227 to resize the video window being pipelined, and times the transfer of data through the pipeline. Overlay control circuitry 230 along with control circuitry 202, controls the output of data through output multiplexer 231, including the overlay of the video window over the graphics data output through the graphics [back-end] backend.

pipeline 205. A pixel doubler is provided to double the number of pixels being generated such that a 1280x1024 display can be driven.

#### Graphics [back-end] backend

pipeline 205 includes a first-in/first-out memory 232, attribute controller 233, and color look-up table 234. Each 32-bit word output from graphics FIFO 232 is serialized into either 8-bit, 16-bit or 24-bit words. The 8-bit words, typically composed of an ASCII code and an attribute code, are sent to attribute controller 233. When 16-bit and 24-bit words, which are typically color data, are serialized, those words are sent directly to overlay controls 230. Attribute controller 233 performs such tasks as blinking and underlining operations in text modes. The eight bits output from attribute controller 233 are pseudo-color pixels used to index CLUT 234. CLUT 234 preferably outputs 24-bit words of pixel data to output multiplexer 231 with each index. When video data is being pipelined through graphics backend pipeline 205 from the on-screen memory, CLUT 234 is bypassed.

The eight bit pseudo-color pixels [are] output from attribute controller 233 are also sent to overlay controls 230. In the preferred embodiment, data is continuously pipelined from on-screen memory through graphics [back-end] backend

pipeline 205 to the inputs of output multiplexer 231. Window data from off-screen memory however is only retrieved from memory and pipelined through video backend pipeline 204 when a window is being displayed. In other words, when a window has been reached, as determined by control bits set by CPU 101 in VW control registers 222, video window display controls 222 generate addresses to retrieve the corresponding data from the off-screen memory space of frame buffer 107. Preferably, video FIFOs 223 and 224 are filled before the raster scan actually reaches the display window such that the initial pixel data is available immediately once the window has been reached. In order to insure that graphics memory data continues to be provided to graphics [back-end] backend pipeline 205, video window display controls 222 "steal" page cycles between page accesses to the graphics memory. It should be noted that once the window has been reached the frequency of cycles used to retrieve window data increases over the number used to fill the video FIFOs when outside a window. When the frequency of window page accesses increases, video window display controls 222/arbiter 221 preferably "steal" cycles from page cycles being used to write data into the frame buffer.

FIG. 3 is a more detailed functional block diagram emphasizing the circuitry controlling the overlay of data from graphics pipeline 205 with window data from video pipeline 204. As discussed briefly above, the inputs to output multiplexer 231 are data from video [back-end] backend

pipeline 204 (pixel doubler 237), 16 or 24-bit color data directly from graphics back-end pipeline 205 serializer 236 and 24-bit color data from the color look-up table 234. The output of data to DAC 210 through output multiplexer 231 is controlled by a latch 301 clocked by the video clock (VCLK). The remaining circuitry shown in FIG. 3, which will be discussed in further detail below, provide the necessary control signals to the control inputs of output multiplexer 231 to select between the video and graphics pipelines.

The graphics pseudo-pixels output from attribute controller 233 and the 16-bit or 24-bit graphics or video data output directly from serializer 236 are provided to the inputs of color comparison circuitry 302. Also input to color comparison [circuit] circuitry

302 are 16 or 24-bit overlay color key bits stored in overlay color key register 303. Overlay color key register 303 resides within the address space of, and is loaded by, CPU 101. Depending on the mode, color comparison circuitry 302 compares selected bits from the overlay color key register 303 with either the 8 bits indexing look-up table 234 in the color look-up table mode (pseudo-color mode) or the 16-bits (24-bits in the alternate embodiment) passed directly from serializer 236. It should be noted that in the illustrated embodiment, overlay color key register 303 holds [24-bits of] 24

of overlay color key bits, eight each for

red, green, and [blue/index] blue index comparisons. The specific overlay color key bits compared with the input graphics data are provided in Table I:

MODE	OVERLAY COLOR KEY BITS COMPARED			
CLUT	—	—	—	Blue/Index
Index	—	—	—	<7:0>
5:5:5	Red<4:0>	Green<4:0>	Blue<4:0>	Blue<4:0>
5:6:5	Red<4:0>	Green<5:0>	Blue<4:0>	Blue<4:0>
8:8:8	Red<7:0>	Green<7:0>	Blue<7:0>	Blue<7:0>

As shown in FIG. 4A, a first embodiment of color comparison circuitry 303 performs the comparisons set forth in Table I as a set of XNOR operations in series with an AND operation. FIG. 4A depicts first comparison circuitry 400 for comparing the 8-bits of graphics pixels received in the look-up table mode from attribute controller 233 with the 8-bit blue/index overlay key bits being held in overlay key register 303. Second comparison circuitry 401, performs the required comparisons of Table I for the 16-bit data or 24-bit received from serializer 236, in, either a 5:5:5, 5:6:5, or 8:8:8 format. An overlay register 402 includes a bit loaded by CPU 101 which is used by a selector 403, depending on the mode, to select for output, either the result of the comparisons being made by comparison circuitry 400 in the color look-up table mode or the results of the comparisons being made by comparison circuitry 401. In the illustrated embodiment, color comparison circuitry 303 processes data on a pixel-by-pixel basis and is resynchronized with both the

graphics [back-end] backend pipeline 205 and the video back-end pipeline 204 by having its outputs latched to the video clock (VCLK) by latches 404.

The output of color comparison circuitry 303 is passed to the "K" control input of overlay control multiplexer 304. The "P" control input to multiplexer 304 is provided from pixel position comparison circuitry 305. The data inputs to multiplexer 304 are coupled to an 8-bit overlay OP Code

(OOC) register 306. The output of multiplexer 304 is used as one control input to output multiplexer 304, which along with a single bit set by CPU 101 into output control register 307, selects which of the data received at the data inputs of multiplexer 231 will be output to DAC 210.

Pixel position comparison circuitry 305 includes three inputs coupled respectively to video window 1 position control circuitry 308, CRT position control circuitry 309 and video window 2 position control circuitry 310. In the illustrated embodiment, CRT position controller 309 is located within CRT controller 220 while video window 1 position control circuitry and video window 2 position control circuitry 310 are located within video display window controls 222 (FIG. 2). CRT position control circuitry 309 includes counters [which,] which

track the position of the current pixel being generated for display. In the preferred embodiment, CRT position control circuitry 309 includes at least an x-position counter which tracks the generation of each pixel along a given display line and a y-position counter which tracks the generation of each display line in a screen. The x-position counter may for example count pixels by counting each VCLK period between horizontal synchronization signal (HSYNC) controlling display unit 106. The y-position counter may for example count each HSYNC signal occurring between each vertical synchronization signal (VSYNC) controlling the screen generation on display unit 106. FIG. 4B is an alternate embodiment of the color comparison circuitry of FIG. 3. In a first mode, 8 bits [are]

from attribute controller 233 are passed through multiplexer to comparator 406. Comparator 406 compares the received eight bits with an 8-bit color key in color key register 408; when the received 8-bits equal the 8-bit key 1, the output of comparator 406 goes active (high). In the first mode, control signal 16BITGR is high (and the output of NOR gate 409 is consequently high) and an active output from comparator 406 is gated through AND gate 410. The output of AND gate 410 is passed to AND gate 411 and gated with the output from the pixel comparison circuitry 305. The output of AND gate 411 goes directly to the "B" control input of selector 231 (in this embodiment multiplexer 304 and register 306 are eliminated). Thus, when the 8-bit graphics pixels output from attribute controller 233 of graphics backend 205 matches the 8-bit color key 1 and the window has been reached as determined by pixel comparison circuitry 305, the pixel data output from video backend 204 are passed through selector 231.

In a second mode, 16 bits are received from serializer 236. The eight LSBs are passed through multiplexer 405 to comparator 406 and the eight MSBs passed to comparator 407. Control signal 16BITNG is set high. When the LSBs equal key 1 in color register key 408 and the 8 MSBs equal key 2 in color key register 408, the outputs from comparators 406 and 407 are active (high). The output of AND gate 411 then goes high when the output from pixel comparison circuitry 305, which is coupled to the "B" control input of selector 231, goes high. Thus, when the 16-bit pixel data output from serializer 236 of graphics backend 205 matches the 16-bit color key (keys 1 and 2) and a window has been reached, the output pixel data from video backend 204 are passed through selector 231.

FIG. 5 is an expanded functional block diagram of the video window position control circuits 308 and a corresponding portion of the gating of pixel position compare circuitry 305. Each position control circuit 310/312 is coupled to a screen position x-register 500 and a screen position y-register 501, and includes a screen x-position counter 502, and a screen y-position counter 503. In the

preferred embodiment, registers 500 and 501 are located within video window control registers 203. For the window corresponding to the given video window control circuitry 308 or 310, registers 500 and 501 are loaded with a value representing the x and y screen position of the pixel in the upper left corner of that window (the starting pixel). Screen x-register 500 and screen y-register 501 in the preferred embodiment are loaded by CPU 101. The screen x-position counter 502 counts down from the value held in screen x-register 500 with each video clock when P is high for each display line and resets with each display horizontal synchronization signal (HSYNC) (Note that when P is high the CRT count matches the position count). Screen y-position counter 503 counts down from the value set into screen y-register 501 for each horizontal sync signal (HSYNC) at the start of each display line and resets with each VSYNC at the start of each new screen (The position counters are allowed to count only when they match their perspective CRT). The counts values in the counters of CRT position control circuitry 309 are compared pixel by pixel with the counts in screen x-position counter 502 and screen y-position 503 of each video window position control circuitry 308 and 310. When both the x and y counts in the counters of CRT position control circuitry 309 match the corresponding x and y counts in respective counters 502 and 503 of either video window control circuitry 308 or 310, the control signal P to multiplexer 304 is activated. The activation of control signal P indicates that the raster scan on display 106 has reached the position of a pixel within the [window] window,

and data from video pipeline 205 may be painted depending on the value being held in overlay OP Code (OOC) register 306 and the K control inputs to multiplexer 304.

A 4-bit OP Code loaded by CPU 101 into overlay OP Code register 306 in conjunction with the control signals applied to the "P" and "K" control inputs to multiplexer 304 control the presentation of an active (assumed high in the illustrated embodiment) control signal to the "B" control input to output multiplexer 231. The other ("A") input to output multiplexer 231 receives a bit from overlay mode register 402 (FIG. 4), as loaded by CPU 101. In the illustrated embodiment, the selection between the streams from the graphics and video backends at the 0,1,2 inputs to output multiplexer 304 in response to the signals presented at the corresponding control inputs "A" and "B" is in accordance with Table II:

Control Input A	Control Input B	Selected Stream
0	0	Graphics or video pixels from graphics pipeline 205
1	0	Graphics pixels from CLUT 234 at input 1
0	1	Video or graphics from video backend 204
1	1	

The OP Codes used in the illustrated embodiment, the effective overlay and the corresponding inputs to the control inputs of multiplexer 304 are listed in Table III (active state is assumed[:]):



Overlay Op Code Register 309 Value	Multiplexer 307 Control Inputs	Effect	
0	N/A	Pixels passed only from graphics pipeline 205	5
A	Input P active	Paint pixels from video backend pipeline 204 only inside video window VDW <sub>n</sub>	10
8	Inputs K and P active	Paint from video backend pipeline 204 window VDW <sub>n</sub> when color key matches	15
C	Inputs K active	Paint from video backend pipeline 204 if color key matches	20

In the illustrated embodiment, if a 0h is written into OOC register 306 by CPU 101, only pixels from graphics pipeline 205 are pipelined through multiplexer 304. In this case any signals applied to the P and K control inputs to multiplexer 304 have no effect (i.e., will not result in a high output from multiplexer 304). In the illustrated embodiment, if an Ah is written into OOC register 306, pixels from video pipeline 204 will be passed to DAC 210 only when pixel position comparison circuitry 305 determines that the raster scan has reached a pixel in the window and hence the control signal going to the P input of multiplexer 304 has been activated. If on the other hand, an 8h is written into OOC register 306, data is passed through output multiplexer 231 to DAC 210 when pixel position comparison circuitry 305 determines that the raster scan has reached a pixel on the display screen within the window and color compare circuitry 302 has determined that the incoming data from graphics pipeline 205 matches the overlay color key held in overlay color key register 303. In this case, the data from video pipeline 204 is passed to DAC 210 when both the P and the K inputs to multiplexer 304 are active. Finally, when an OpCode of C is programmed into OOC register 306, data from video pipeline 204 is passed if the incoming data from graphics pipeline 205 matches the overlay color key held in overlay color key register 303. In this case, the activation of the K control input activate the output of multiplexer 304 to switch the input of multiplexer 231 to pass the corresponding video pixels.

Display control circuits embodying the principles of the present invention have substantial advantages over the prior art. In particular, output control circuits built in accordance with the principles of the present invention allow for the flexible display of both graphics and video on the same screen. In particular, pixel position comparison circuitry 305 along with video window position control circuits 308 and 310 and CRT position control circuitry 309 allow for [a]

one or more windows from off-screen memory to be generated in specific areas of a display screen to the exclusion of any simultaneously generated data from on-screen memory. Further, color comparison circuitry 302 operating in conjunction with an overlay color key written into overlay color key register 303 allows window data to be presented on the display screen, to the exclusion of any concurrently generated graphics data, without the need for precise x- and y-position data for the window. Finally, the use of the graphics data from the graphics pipeline 205 to control the output overlay provides additional advantages since the video data can be subject to graininess and noise.

Although the present invention and its advantages have been described in detail, it should be understood that various changes, substitutions and alterations [an] can be made herein without departing from the spirit and scope of the invention  
5 as defined by the appended claims.

11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
2197  
2198  
2199  
2200  
2201  
2202  
2203  
2204  
2205  
2206  
2207  
2208  
2209  
2210  
2211  
2212  
2213  
2214  
2215  
2216  
2217  
2218  
2219  
2220  
2221  
2222  
2223  
2224  
2225  
2226  
2227  
2228  
2229  
2230

is claimed is:

1. A single integrated graphics and video controller adapted for driving a display sequentially

comprising:

an interface for receiving words of pixel data, each said word associated with an address buffer;

10 circuitry for writing each said word of said pixel data received by said interface to a one of on-screen and off-screen memory areas of a frame buffer;

circuitry for selectively retrieving

as data is provided for display, said words from said on-screen and off-screen areas;

15 a first pipeline for substantially continuously processing words of graphics data retrieved from said frame buffer; and

a second pipeline for processing words of video data retrieved from said frame buffer so that the video data is ready for display once a display raster scan reaches a display position of a window.

2. The controller of claim 1 and further comprising output selection circuitry for selecting for output between graphics data received from said first pipeline and data received from said second pipeline, said selection circuitry operable to:

in a first mode, pass data from said

[first pipeline:] first pipeline; and

25 in a second mode, pass data from said second pipeline when said data corresponds to a selected display position of a display window.

3. The controller of claim 2 wherein said selection circuitry is further operable to:

30 in a third mode, pass data from said second pipeline when said data corresponds to said selected display position of said display window and data from said first pipeline match a color key.

4. The controller of claim 3 wherein said selection circuitry is further operable in a fourth mode to pass data from said second pipeline when data from said first pipeline match a color key.

5. The controller of claim 1 wherein said circuitry for retrieving maintains a stream of graphics data to said first pipeline and provides video data to said second pipeline when a display raster scan reaches [said display] a display [said window] a window. position of

6. The controller of claim 1 and further comprising:

a video port for receiving real-time video data; and

45 circuitry for generating an address to said memory at which said real-time video data is to be stored.

7. The controller of claim 1 wherein said second pipeline includes a first first-in-first-out memory for receiving data for a first display line of pixels in memory and a second first-in-first-out memory for receiving data from a second display line of [pixels memory] pixels in memory.

8. The controller of claim 7 wherein said first display [line adjacent] line is adjacent in memory to said second display line.

9. The controller of claim 7

further comprising output selection circuitry

wherein said output selection

55 circuitry comprises:

an output selector for selecting between data from said second pipeline and data from said first pipeline in response to a selection control signal;

60 a register for maintaining a plurality of overlay control bits;

window position control circuitry for selectively generating a position control signal when a word of said data stream from said second pipeline falls within a display window;

65 color comparison circuitry for comparing words of said data stream from said first pipeline with a color key and

OFFICIAL RECORD

control signal in response to said overlay control bits in  
said register and at least one of said position control and  
color comparison control signals.

window position counters operable to increment from initial count values corresponding to a starting pixel of a display window as data representing each pixel in a display screen is pipelined through said overlay control circuitry;

comparison circuitry operable to compare a current count in said window position counters and a current count in said screen position counters and selectively generate said position control signal in response.

a color key register for storing bits composing said color key; and

12. The controller of claim 1 wherein said interface includes a dual-aperture port.

data into [s] a each word of received <sup>30</sup>

a first port for receiving video and graphics data, a word of said data received with an address of said memory spaces directing said word to be processed as a word of video data or a word of graphics data;

a second port for receiving real-time video data;  
circuitry for generating an address associated with a  
selected one of said memory spaces for a word of said  
real-time video data;

circuitry for selectively retrieving said words of data  
on a word by word basis \_\_\_\_\_ from  
said on-screen and off-screen memory spaces as data is  
rastered for driving a display in a sequential fashion

a graphics backend pipeline for processing ones of said words of data representing graphics data retrieved from said frame buffer;

a video backend pipeline, separate from said graphics backend pipeline,

for processing other ones of said words of data representing video data retrieved from said frame buffer, said circuitry for retrieving always rastering a stream of data from said frame buffer to said graphics backend pipeline and rastering video data to said video backend pipeline [when] so that the video data is ready for display once

a display raster scan reaches a display position of a window; and  
output selector circuitry for selecting for output between  
words of data output from said graphics backend pipeline and words of data output from said video backend pipeline.

14. The controller of claim 13 wherein said output selec- 60  
tor circuitry

is further operable to select between graphics data output from a color look-up table and true color data output from said graphics pipeline.

15. The controller of claim 13 wherein said output selector circuitry

is operable to:  
in a first mode, pass only a word of data output from said  
graphics pipeline;

in a second mode, pass a word of data output from said video pipeline when said display raster scan has reached a display position corresponding to a window and a word of data from said graphics pipeline when said display raster scan is in any other display position;

5 in a third mode, pass a word of data output from said video pipeline when said display raster scan has reached a display position corresponding to a window and a corresponding word of data from said graphics pipeline matches a color key and a word of data from said graphics pipeline when said display raster scan is in any other display position; and

10 in a fourth mode, pass a word of data from said video pipeline when said corresponding word of data from said graphics pipeline matches a color key and a word of data from said graphics pipeline when said [display raster scan is in any other display position] corresponding word does not match said color key.

16. The controller of claim 13 wherein said video pipeline includes a first first-in-first-out memory for receiving a plurality of words of data for a first display line of pixels in memory and a second first-in-first-out memory

20 [or] for receiving a plurality of words of data [from] for a second display line of pixels in memory.

17. The controller of claim 16 wherein said first display line is stored adjacent in memory to said second display line.

25 18. The controller of claim 13 wherein said output selector circuitry comprises:

a control selector having a plurality of control inputs coupled to a register, said register storing a plurality of overlay control bits;

30 window position control circuitry coupled to a first control input of said control selector, said window position control circuitry operable to selectively provide a first control signal to said first control input when a word of data being pipelined through said video pipeline falls within a display window;

35 color comparison circuitry operable to compare a word of data being pipelined through said graphics pipeline with a color key and provide in response a second control signal to a second control input of said control selector; and

40 wherein said control selector is operable to provide an output selection control signal in response to at least one of said first and second control signals and said overlay control bits being stored in said register.

45 19. The circuitry of claim 18 wherein said output selector circuitry further includes a third control input coupled to certain bits of said graphics pipeline, said output selector circuitry further

operable to select between data on said respective video and graphics pipelines in response to said certain bits presented to said selector circuitry.

20. The circuitry of claim 18 wherein said window position control circuitry comprises:

55 a window x-position counter operable to count from a loaded x-position value in response to a video clock, said x-position counter reloading in response to a display horizontal synchronization signal;

60 a window y-position counter operable to count from a loaded y-position value in response to said horizontal synchronization signal, said y-position counter reloading in response to a display vertical synchronization signal;

CRT position circuitry operable to maintain counts corresponding to a current display pixel; and

65 comparison circuitry operable to compare current counts in said window counters with said current counts held

in said CRT position circuitry and generate in response said first control signal.

21. The circuitry of claim 20 wherein said window position control circuitry further comprises an x-position register for holding said x-position value for loading into said x-position counter and a y-position register for holding said y-position value for loading into said y-position counter.

22. The circuitry of claim 13 wherein said color comparison circuitry comprises:

- a color key register for storing a plurality of color key bits;
- and
- a plurality of XNOR-gates each having at least one input coupled to a bit position in said color key register and at least one input coupled to said graphics data path.

23. The circuitry of claim 13 wherein said video pipeline comprises:

- a first-in/first-out memory for receiving a first stream of words of data from said frame buffer;
- a second first-in/first-out memory disposed in parallel with said first first-in/first-out memory for receiving a second stream of words of data from said frame buffer;
- and

interpolation circuitry for selectively generating an additional word of data by interpolating a word of said first stream and a word of **said second**

stream data output from said first and second first-in/first-out memories.

24. The controller of claim 13 wherein said first [pore] port comprises a dual-aperture port.

25. A display system comprising:

- a first backend pipeline for processing data;
- a second backend pipeline for processing graphics data disposed in parallel to said first processing pipeline;
- a multi-format frame buffer memory having on-screen and off-screen areas each operable to
- to allow said frame buffer to
- simultaneously
- store data in graphics and video formats;

[a] an

input port for receiving both graphics and video data, each word of said data associated with an address directing said word to be processed as either graphics or video data;

circuitry for writing a word of said playback data into a selected one of said areas of said multi-format memory; memory control circuitry for controlling the transfer of data between said first backend pipeline and said frame buffer and between said second backend pipeline and said frame buffer;

a display unit; and

overlay control circuitry for selecting for output to said display unit between data provided by said first backend pipeline and data provided by said second backend pipeline.

26. The display system of claim 25 wherein said second backend pipeline includes:

- a first first-in-first-out memory for receiving first selected data;
- a second first-in-first-out memory disposed in parallel to said first first-in-first-out memory for receiving second selected data; and

interpolation data for generating additional data by interpolating data output from said respective first and second first-in-first-out memories.

27. The display system of claim 26 wherein said second backend pipeline further comprises color conversion circuitry for converting data received from said frame buffer in a video format to a graphics format.

28. The display system of claim 25 [and]

further comprising  
a video front-end pipeline for inputting video data into a  
selected one of on-screen and off-screen spaces of said frame  
buffer comprising:

- 5 a video data port for receiving video data from a real time  
data **source; and**  
input control circuitry for receiving framing signals asso-  
ciated with said real time data and generating corre-  
sponding addresses to said selected one of said spaces  
10 in response.

29. The display system of claim 28 wherein said video  
front-end pipeline further comprises encoding circuitry for  
packing said video data prior to storage in said selected one  
**of said**  
spaces.

- 15 30. The display system of claim 28 wherein said video  
front-end pipeline further [comprising] comprises  
multiplexing circuitry  
for selecting between video data received through said video  
data port and data received from [said] a dual

aperture port.  
31. The display system of claim 30 wherein said video  
front end pipeline further comprises conversion circuitry for  
20 converting graphics data received through said dual-aperture  
port to a video format for storage in said selected one of said  
spaces.

32. The display system of claim 25 wherein said first  
backend pipeline processes playback video.

- 25 33. The display system of claim 25 wherein said input port  
comprises a dual-aperture input port.

34. A single integrated  
display data processing system comprising:

- circuitry for writing data into an on-screen space of a  
frame buffer;  
30 circuitry for writing data into an off-screen space of said  
frame buffer;  
a video pipeline for processing data output from a selected  
one of said on-screen and off-screen spaces comprising:  
35 a first first-in-first-out memory for receiving selected  
data from said selected space;  
a second first-in-first-out memory disposed in parallel  
to said first first-in-first-out memory for receiving  
other selected data from said selected space; and  
40 an interpolator for generating additional data by inter-  
polating data output from said respective first and  
second first-in-first-out memories;

a graphics pipeline disposed in parallel to  
and separate from

- said video  
pipeline for processing data output from a selected one  
of said on-screen and off-screen spaces; and  
45 an output selector for selecting between data output from  
said video pipeline and data output from said graphics  
pipeline.

ALL INFORMATION CONTAINED  
HEREIN IS UNCLASSIFIED  
DATE 11-03-2010 BY 60322 UCBAW

[illegible]

50 selection control circuitry for generating an output control signal for controlling said output selector comprising:  
a control selector having a plurality of data inputs coupled to a register, said register for storing a plurality of overlay control bits; and  
55 color comparison circuitry operable to compare bits of data output from said graphics pipeline with a color key and provide in response a control signal to a control input of said control selector.

60 window position control circuitry operable to provide a second control signal to a second control input of said control selector when data from said video pipeline falls within a display window.

65     circuitry for selectively retrieving data from an associated  
      multi-format frame buffer, the frame buffer having  
     separate storage locations respectively operable for allowing  
                                 \                     for simultaneously  
     [snoring] storing  
     graphics and video data;

```

1  irr_said frame buffer;

```



a first pipeline for processing words of graphics data selectively retrieved from said frame buffer; and

a second pipeline, separate from the first pipeline,

for processing words of video data selectively retrieved from said frame buffer.

38. The controller of claim 37 wherein said first and second pipelines are disposed in parallel and concurrently process data.

39. The controller of claim 38 [and]

further comprising output selection circuitry for selecting for output between graphics data received from said first pipeline and video data received from said second pipeline.

40. The controller of claim 37 wherein said frame buffer is partitioned into on-screen and off-screen areas, each of said on-screen and off-screen areas operable to allow the buffer to

simultaneously store both graphics and video data.

41. The controller of claim 37 wherein said circuitry for selectively retrieving is operable to retrieve a substantially

constant stream of graphics data from said frame buffer and provide said stream of graphics data to said first pipeline.

42. The controller of claim 41 wherein said circuitry for selectively retrieving is operable to retrieve at least one said word of video data from said frame buffer and provide said at least one word of said video data to said second pipeline, only when said display controller is generating a video display window.

43. A display controller for interfacing a multi-format frame buffer and a display device, the multi-format frame buffer having on-screen and off-screen areas each operable for simultaneously storing both graphics and video pixel data in the frame buffer,

said display controller comprising:

circuitry for selectively retrieving pixel data from a selected one of said on-screen and off-screen areas of said frame buffer;

a graphics backend pipeline for processing graphics data retrieved from said selected one of said areas of said frame buffer;

11/01/2003 10:00 AM

a video backend pipeline for processing video data retrieved from said selected one of said areas of said frame buffer; and

- 5 an output selector for selectively passing to said display device data received from said graphics or video backend pipelines.

44. The display controller of claim 43 wherein said circuitry for selectively retrieving is operable to retrieve at  
10 least one said word of video data from said frame buffer and provide said at least one said word of video data [no] to

said second pipeline only when said display controller is generating a video display window.

- 15 45. The display controller of claim 43 wherein said output selector is operable to:

in a first [modes] mode

pass data from said graphics pipeline; and

in a second [modes] mode

pass data from said video pipeline

- 20 when a display position corresponding to a video display window has been reached.

46. The display window of claim 43 wherein said output selector is operable to:

in a first mode, pass data from said graphics pipeline; and

- 25 in a second mode, pass data from said video pipeline when a display position corresponding to a video display window has been reached and data from said graphics pipeline match a color key.

30 47. The display controller of claim 43 wherein said output selector is operable to:

in a first mode, pass data from said graphics pipeline; and

- 35 in a second mode, pass data from said video pipeline when data from said graphics pipeline matches a color key.

48. The controller of claim 42 in which graphics data is substantially

continuously retrieved for a display while video data is retrieved only for the video display window.


\* \* \* \* \*

[57]

#### ABSTRACT

A graphics and video controller 105 is provided which includes a dual aperture interface 206 for receiving words of graphics and video pixel data, each word of such data associated with an address directing that word to be processed as either graphics or video data. Circuitry 200, 201, 202, 207, 208 is provided for writing a word of the pixel data received from the interface 206 to a one of the on- and off-screen memory areas corresponding to the address associated with the received word. Circuitry 201, 202 is provided for selectively retrieving graphics and video data from the on-screen and off-screen memory areas. A first pipeline 205 is provided for processing data received from the on-screen area of frame buffer 107 while a second pipeline 204 is provided for processing data retrieved from the off-screen area of the frame buffer.

105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000

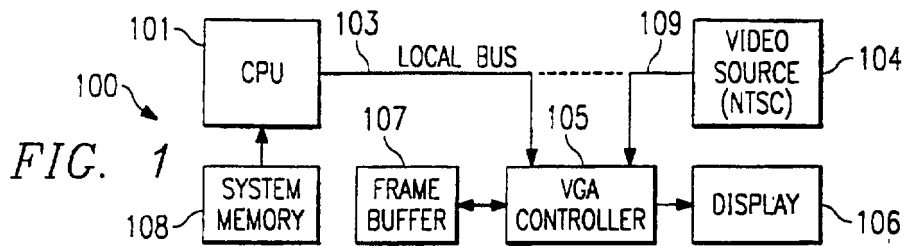

**FIG. 4A**




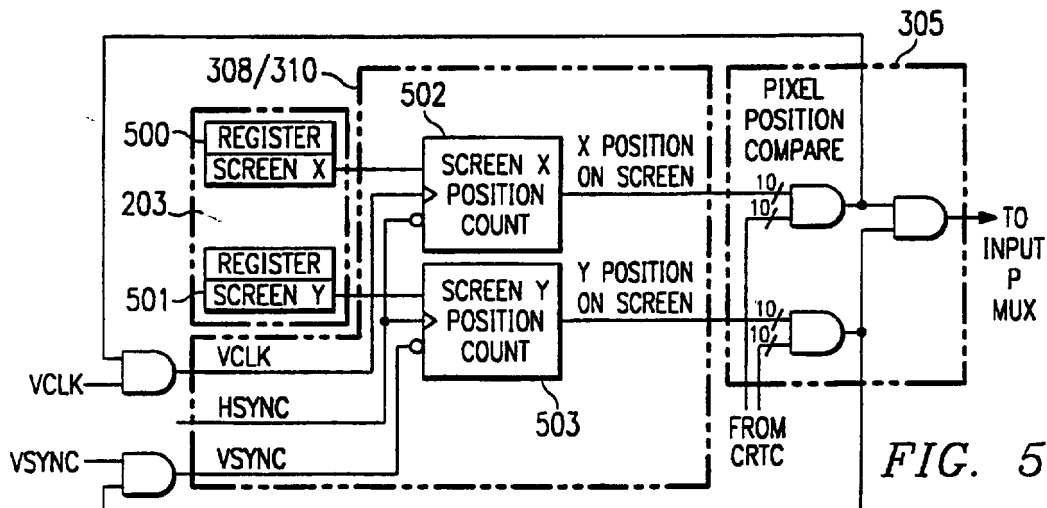


FIG. 2

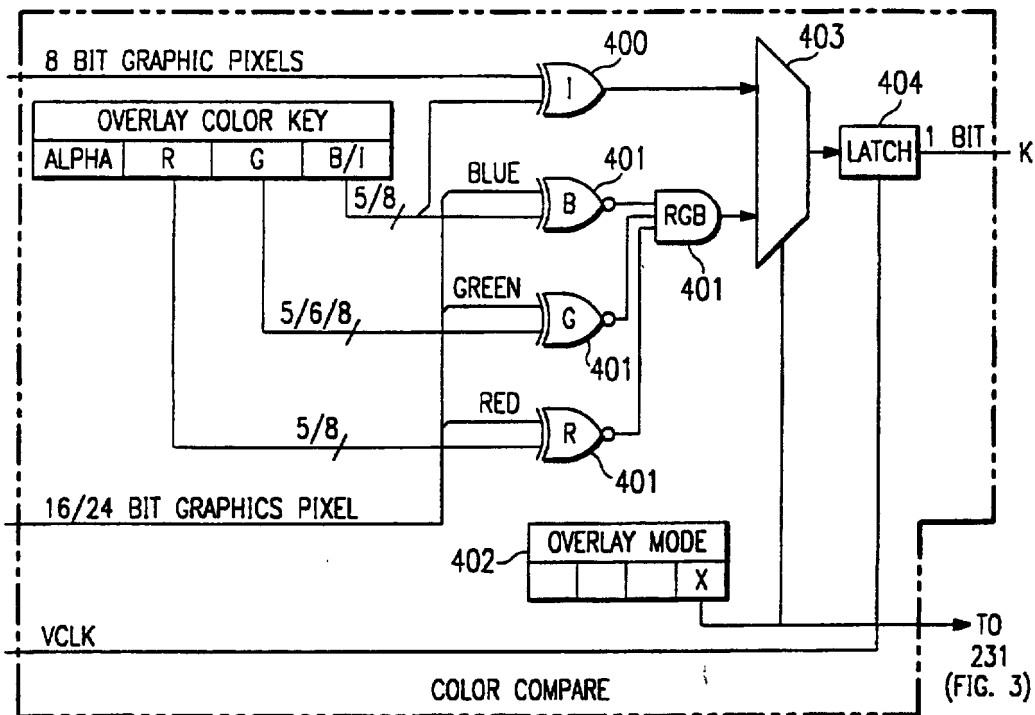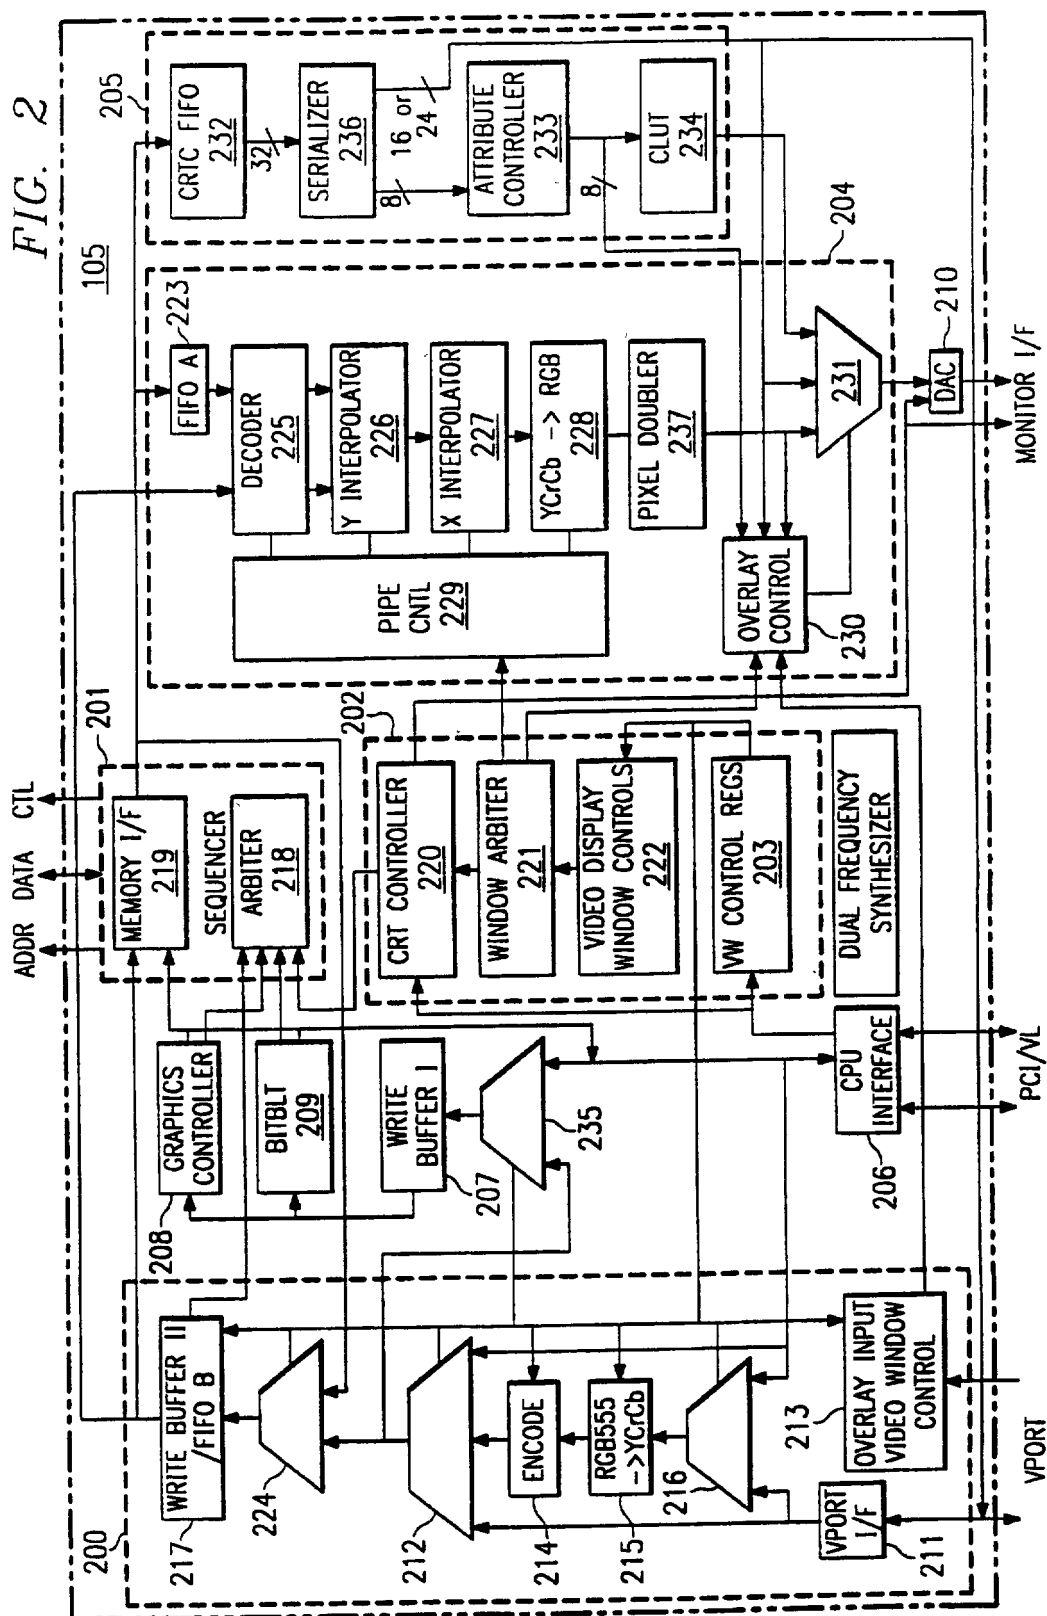

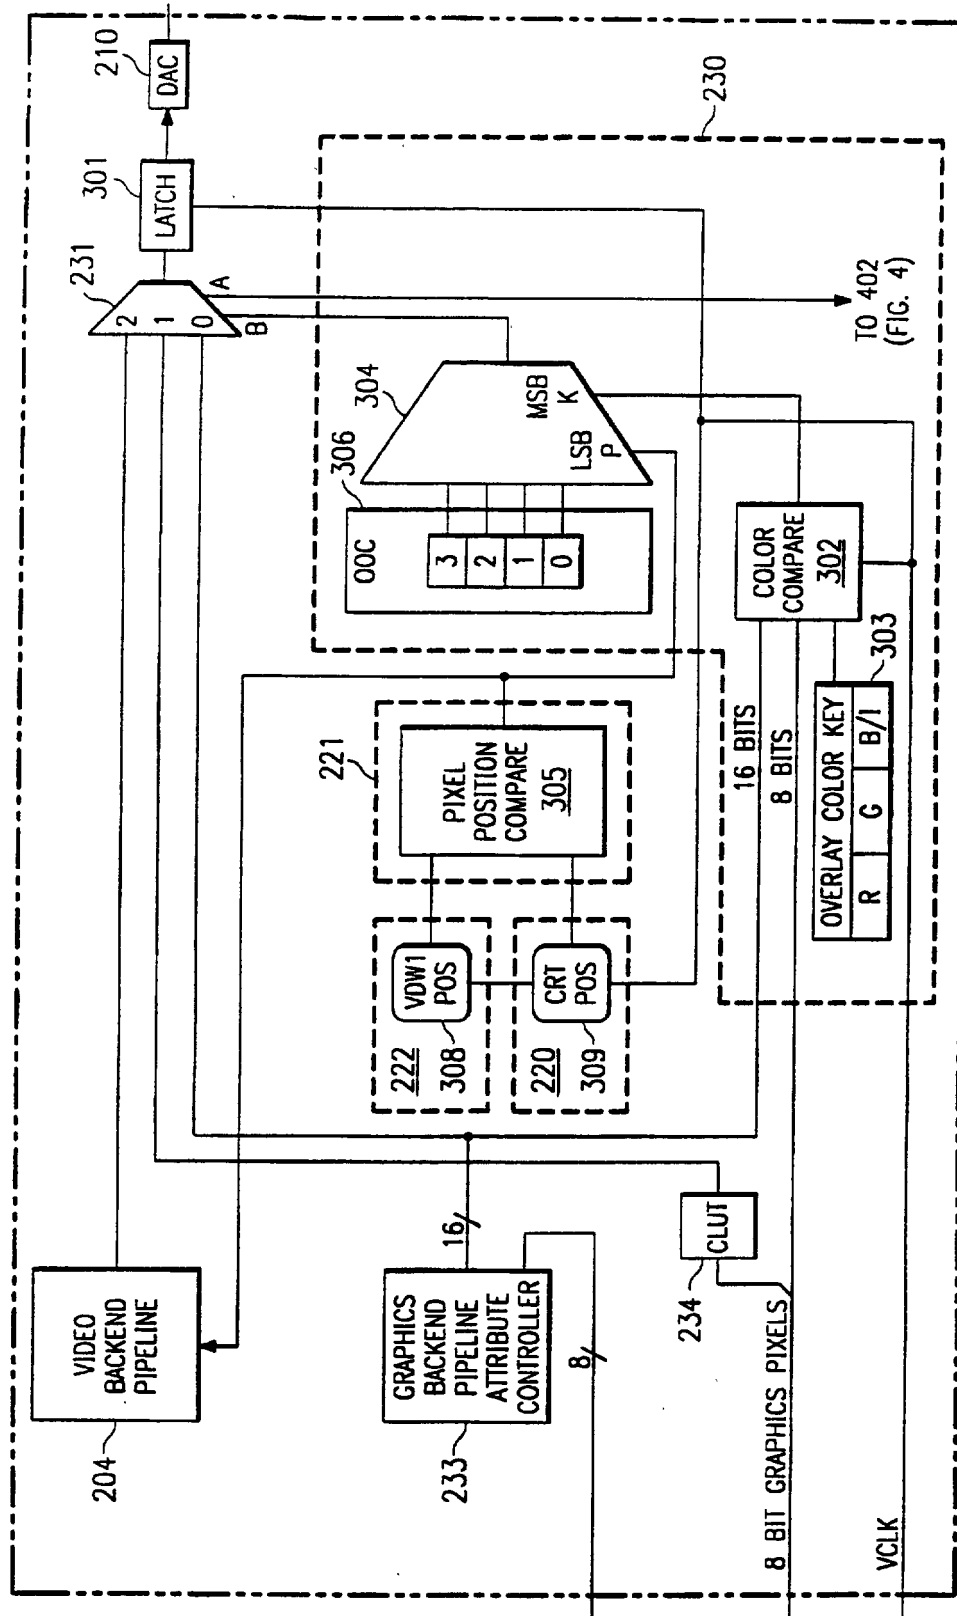

**FIG. 3**

FIG. 4B

